

**Uw CALCULATION**


1)	AREA of GLASS	0,38	m <sup>2</sup>
2)	GLASS Ug Value	1,10	W/m <sup>2</sup> .K
3)	AREA of PVC PR.	0,37	m <sup>2</sup>
4)	PVC PR. Uf Value	1,39	W/m <sup>2</sup> .K
5)	CIRCUMFERENCE of GLASS	3,17	m
	PSI of GLASS	0,04	W/m.K

(PSI FIX)


**WINDOW Uw VALUE**

**1,42** W/m<sup>2</sup>.K

Kiepramen / Fenêtres abattantes / Tilt windows

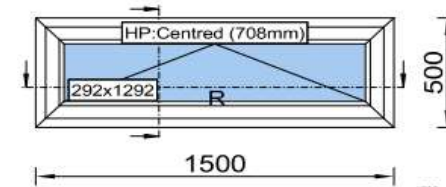


**Glass Combination**


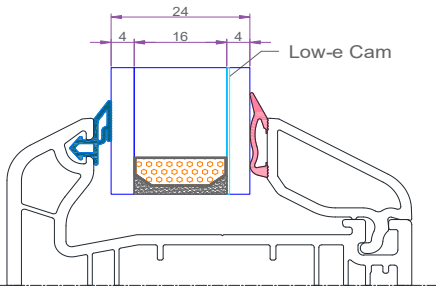


Ug= 1,1 W/m<sup>2</sup>.K

**Uf Calculation**



$$U_{f,ab} = \frac{7,876}{20,0} - \frac{1,169 \cdot 0,195}{0,119} = 1,3942 \text{ W/(m}^2\text{.K)}$$

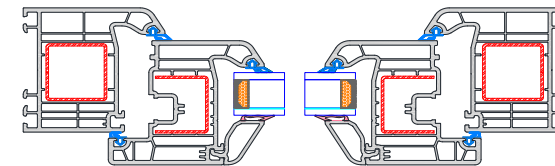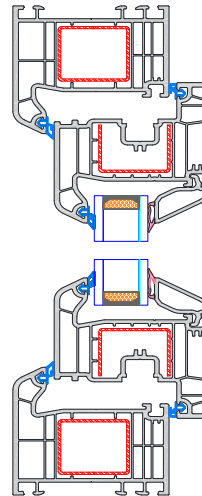

**\*\*Note\*\***

\*\*These results are theoretical values obtained in a computer environment using the flixo program. They may differ from tests performed under real-world conditions.

\*\*These calculations have been prepared for informational purposes only. Ramendepot accepts no responsibility for the results provided.